



KERN

Robust industrial crane scale with bright LED display for optimum reading in unfavourable ambient conditions


Features

- **1** With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/ Breakage resistance) and EN 61010-1 (Electrical safety)
- Professional device for robust applications in production, quality control, logistics etc. Because of its stable construction and robust design, it is ideal for continuous use in industrial environment
- High mobility: thanks to rechargeable battery operation, compact, lightweight construction, it is suitable for the use in several locations (production, warehouse, dispatch department etc.)

- Adaptation to unstable environmental conditions by changing the readability
- Hold function: the weight display is „frozen“ when the Hold button is pressed
- Tare: Resets the display to „0“ when there is a load on the scale. Now removed or added loads are directly displayed
- Hook with safety catch, revolving
- **2** Radio remote control standard. Range up to 20 m. All functions can be selected (excl. ON/OFF). WxDxH 48x10x95 mm. Batteries included, 2x1.5 V AAA

Technical data

- Superior display size: digit height 30 mm, bright backlight for easy reading of weighing results, even in poor lighting conditions
- Rechargeable battery pack integrated, as standard, operating time up to 50 h without backlight, charging time approx. 14 h
- Precision: 0,2 % of [Max]
- Permissible ambient temperature 0 °C/40 °C

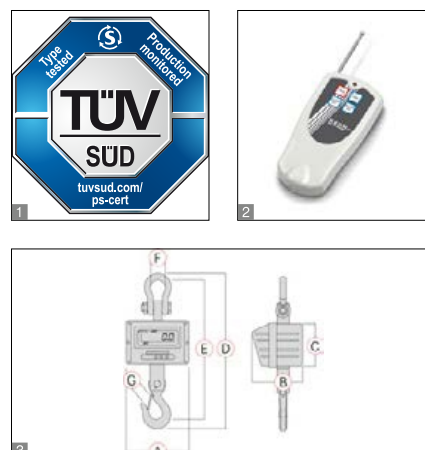

STANDARD



OPTION



Model	Weighing capacity [Max] kg	Readability [d] g	Net weight approx. kg	3 Dimensions							DAkKS Calibr. Certificate
				A mm	B mm	C mm	D mm	E mm	F mm	G mm	
KERN											DAkKS
HFM 1T0.1	1000	100	14	270	200	175	610	540	68	40	KERN
HFM 3T0.5	3000	500	16	270	200	175	610	540	74	40	963-130H
HFM 5T0.5	5000	500	24	300	230	190	730	650	74	55	963-132H
HFM 10T1	10000	1000	34	300	230	190	840	750	92	60	963-133H