

S2-B

Capacidad Capacity - Capacité
750 - 1000 - 1500 - 2000 - 3000 - 5000 - 6000 - 10000 kg

CE
Certificate
N° E-00.02.C04

Hasta 4000 divisiones OIML-R60

Up to 4000 divisions OIML-R60

Jusqu'à 4000 divisions OIML-R60

Soporte elástico de acero aleado

Measuring element from alloy steel

Support élastique d'acier allié

Disponível em aço inoxidável

Available in stainless steel

Disponível en acier inoxydable

Disponível con opción de Re=1000Ω

Option Input Resistance 1000 Ω available

Option disponible Résistance d'entrée 1000 Ω

Estanqueidad IP-67 (EN 60529)

Protected against humidity IP-67 (EN 60529)

Étanchéité IP-67 (EN 60529)

Características técnicas

Technical Data

Caractéristiques Techniques

Clase de precisión

Accuracy class

C3-C4

Classe de précision

Sensibilidad

Rated output

$2 \pm 0.1\% \text{ mV/V}$

Sensibilité

Vmin

Vmin

$E_{\text{max}}/12000$

Vmin

Tensión de alimentación

Excitation Voltage

$5 \pm 15 \text{ V}$

Tension d'alimentation

Resistencia de entrada

Input Resistance

$350 \pm 5 \Omega$

Résistance d'entrée

Resistencia de salida

Output resistance

$350 \pm 3 \Omega$

Résistance de sortie

Margen de temperatura compensado

Temperature Compensation

$-10^\circ \text{ C} / +40^\circ \text{ C}$

Compensation de température

Límites de temperatura

Temperature limits

$-30^\circ \text{ C} / +70^\circ \text{ C}$



Limites de température

Resistencia de aislamiento

Insulation resistance

$> 5000 \text{ M } \Omega$

Résistance d'isolement

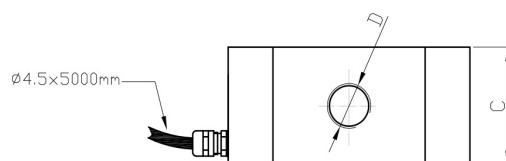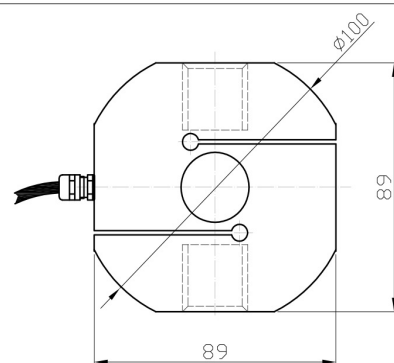

Capacidad (Kg)

Capacity - Capacité

	750	1000	1500	2000	3000	5000	6000	10000
C	35	35	35	42	42	42	42	52
D	M12	M12	M16	M16	M24x2	M24x2	M24x2	M24x2

Conexión


Connections

Connexions

Sense opcional

Optional Sense

Sense optionnel

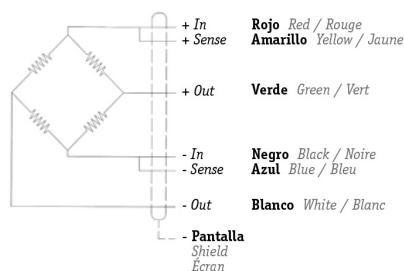

S2-B


Accesorios *Accessories - Accessoires*

Dimensiones en mm
Size in mm - Dimensions en mm

Rótulas para tracción

Knuckle eye

Rotules de traction

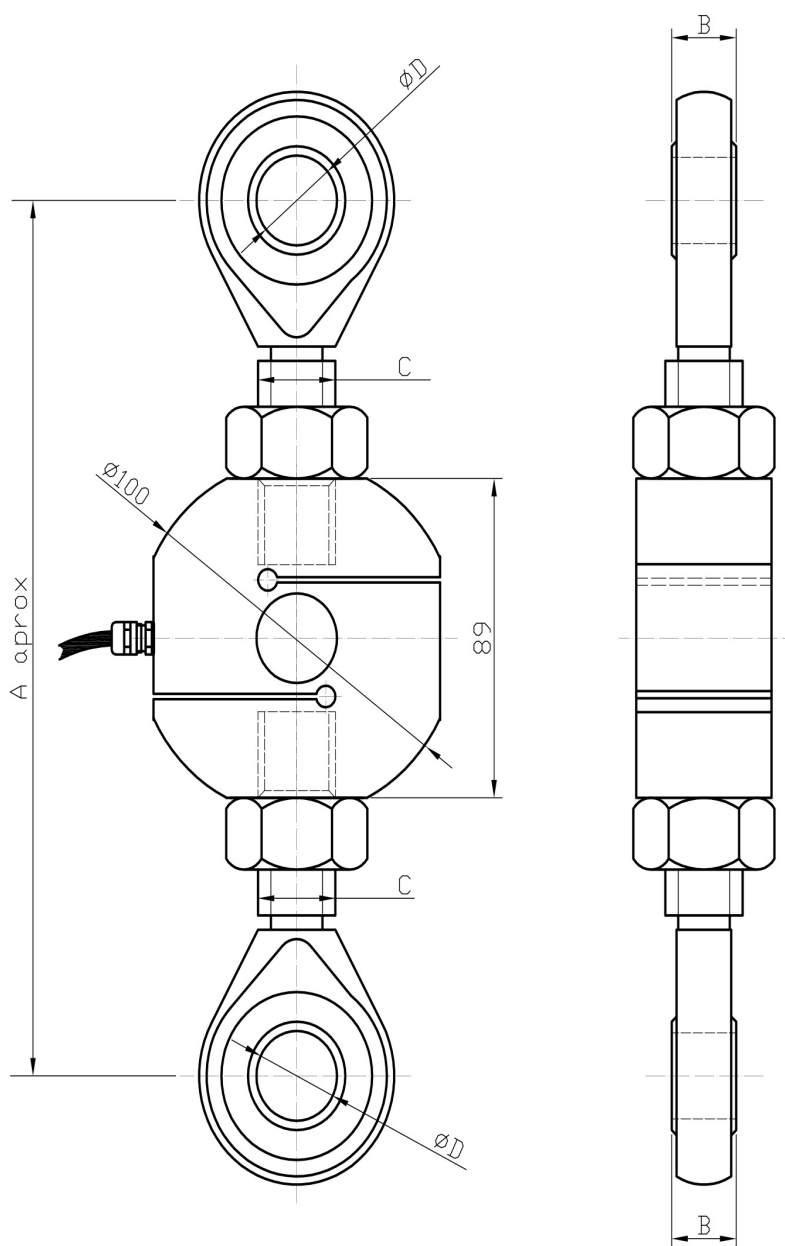

Capacidad (Kg)

Capacity - Capacité 750 1000 1500 2000 3000 5000 6000 10000

A 157/163 183/192 235/240

B 16 14 20